


STOPY HIGIENICZNE 2024

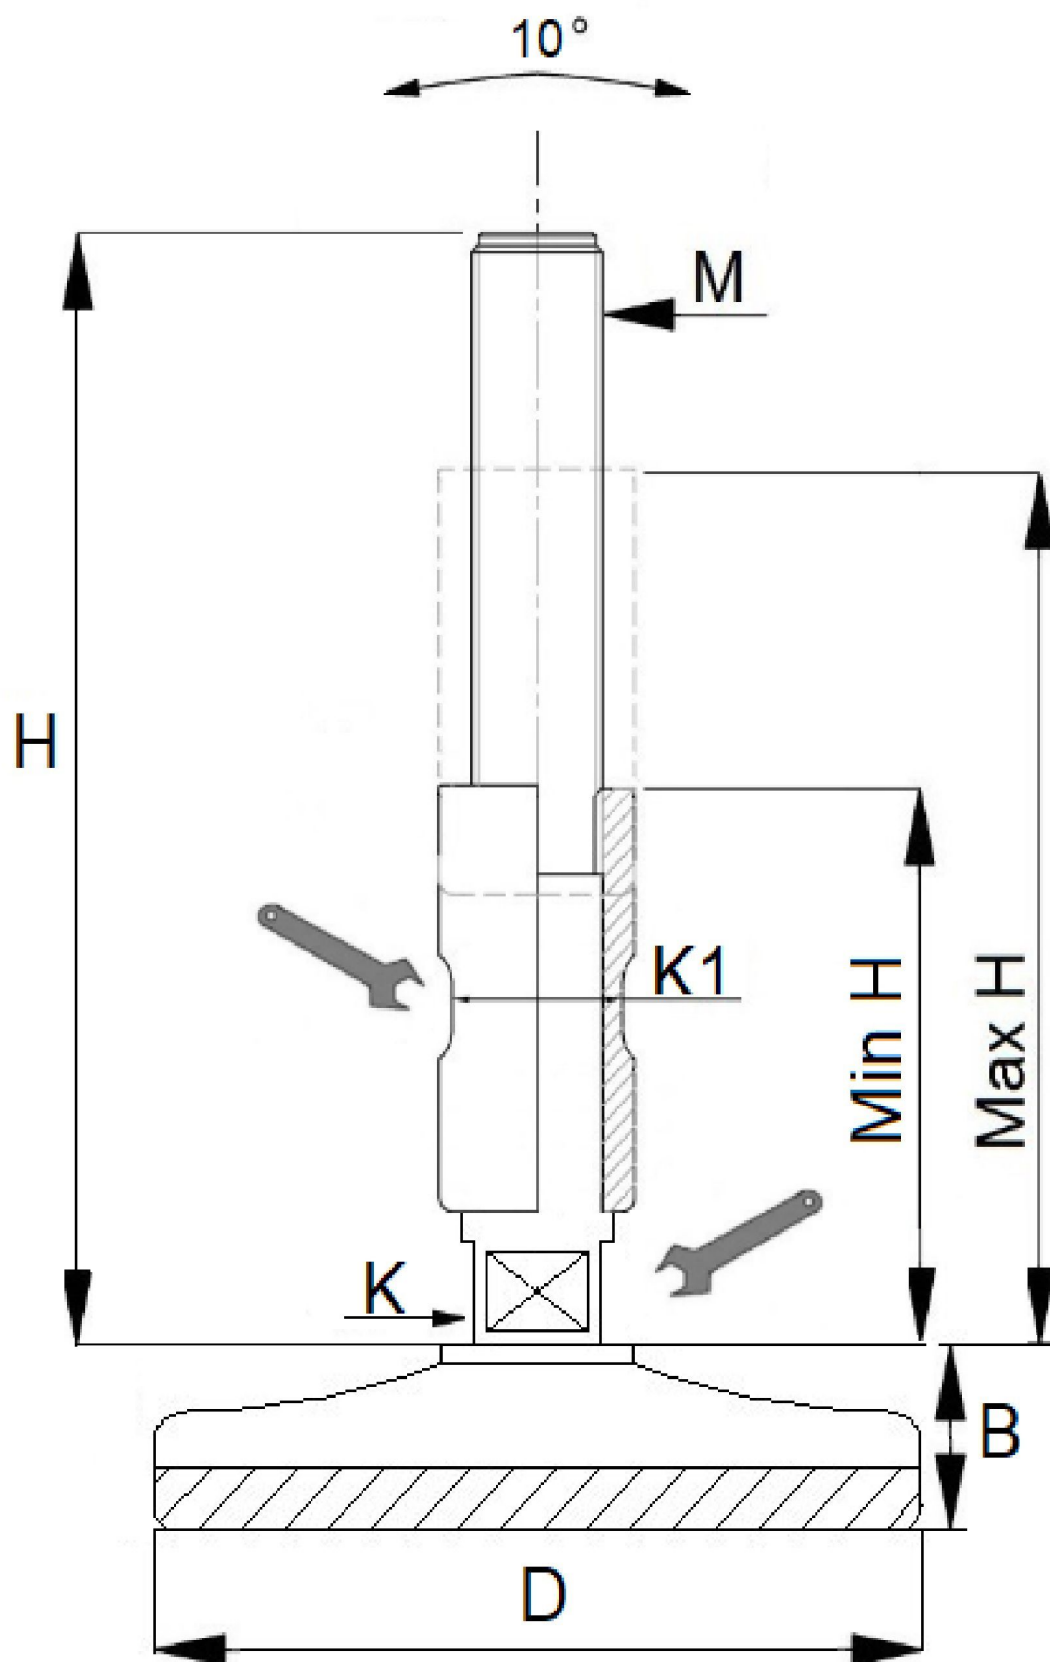

STOPY HIGIENICZNE ŚREDNIE OBCIĄŻENIA

Numer kat.	STOPY HIGIENICZNE ŚREDNIE OBCIĄŻENIA							Max kg.
	D	M	H	H-min	H-max	B	K	
5012135VLH	Ø50	M12	135	80	120	17	10	400 kg
5012175VLH	Ø50	M12	175	100	160	17	10	400 kg
5012115VLH	Ø50	M12	215	120	200	17	10	400 kg
8212135VLH	Ø82	M12	135	80	120	19	10	1000 kg
8212175VLH	Ø82	M12	175	100	160	19	10	1000 kg
8212115VLH	Ø82	M12	215	120	200	19	10	1000 kg
10112135VLH	Ø101	M12	135	80	120	24	10	2500 kg
10112175VLH	Ø101	M12	175	100	160	24	10	2500 kg
10112115VLH	Ø101	M12	215	120	200	24	10	2500 kg
5016135VLH	Ø50	M16	135	80	120	17	13	400 kg
5016175VLH	Ø50	M16	175	100	160	17	13	400 kg
5016115VLH	Ø50	M16	215	120	200	17	13	400 kg
8216135VLH	Ø82	M16	135	80	120	19	13	1000 kg
8216175VLH	Ø82	M16	175	100	160	19	13	1000 kg
8216115VLH	Ø82	M16	215	120	200	19	13	1000 kg
10116135VLH	Ø101	M16	135	80	120	24	13	2500 kg
10116175VLH	Ø101	M16	175	100	160	24	13	2500 kg
10116115VLH	Ø101	M16	215	120	200	24	13	2500 kg
5020135VLH	Ø50	M20	135	80	120	17	17	400 kg
5020175VLH	Ø50	M20	175	100	160	17	17	400 kg
5020115VLH	Ø50	M20	215	120	200	17	17	400 kg
8220135VLH	Ø82	M20	135	80	120	19	17	1000 kg
8220175VLH	Ø82	M20	175	100	160	19	17	1000 kg
8220115VLH	Ø82	M20	215	120	200	19	17	1000 kg
10120135VLH	Ø101	M20	135	80	120	24	17	2500 kg
10120175VLH	Ø101	M20	175	100	160	24	17	2500 kg
10120115VLH	Ø101	M20	215	120	200	24	17	2500 kg

STOPY HIGIENICZNE DUŻE OBCIĄŻENIA

Numer kat.	STOPY HIGIENICZNE DUŻE OBCIĄŻENIA							Max kg.
	D	M	H	H-min	H-max	B	K	
8012135VLH	Ø80	M12	135	80	120	16	10	2000 kg
8012175VLH	Ø80	M12	175	100	160	16	10	2000 kg
8012115VLH	Ø80	M12	215	120	200	16	10	2000 kg
10012135VLH	Ø100	M12	135	80	120	17	10	4000 kg
10012175VLH	Ø100	M12	175	100	160	17	10	4000 kg
10012115VLH	Ø100	M12	215	120	200	17	10	4000 kg
8016135VLH	Ø80	M16	135	80	120	16	13	2000 kg
8016175VLH	Ø80	M16	175	100	160	16	13	2000 kg
8016115VLH	Ø80	M16	215	120	200	16	13	2000 kg
10016135VLH	Ø100	M16	135	80	120	17	13	4000 kg
10016175VLH	Ø100	M16	175	100	160	17	13	4000 kg
10016115VLH	Ø100	M16	215	120	200	17	13	4000 kg
8020135VLH	Ø80	M20	135	80	120	16	17	2000 kg
8020175VLH	Ø80	M20	175	100	160	16	17	2000 kg
8020115VLH	Ø80	M20	215	120	200	16	17	2000 kg
10020135VLH	Ø100	M20	135	80	120	17	17	4000 kg
10020175VLH	Ø100	M20	175	100	160	17	17	4000 kg
10020115VLH	Ø100	M20	215	120	200	17	17	4000 kg

STOPY HIGIENICZNE DUŻE OBCIĄŻENIA Z OTWORAMI

Numer kat.	STOPY HIGIENICZNE DUŻE OBCIĄŻENIA Z OTWORAMI								Max kg.
	D	M	H	H-min	H-max	B	Ø otwory w podstawie	K	
8012135VLHOT	Ø80	M12	135	80	120	16	8,5 mm	10	2000 kg
8012175VLHOT	Ø80	M12	175	100	160	16	8,5 mm	10	2000 kg
8012115VLHOT	Ø80	M12	215	120	200	16	8,5 mm	10	2000 kg
10012135VLHOT	Ø100	M12	135	80	120	17	10,5 mm	10	4000 kg
10012175VLHOT	Ø100	M12	175	100	160	17	10,5 mm	10	4000 kg
10012115VLHOT	Ø100	M12	215	120	200	17	10,5 mm	10	4000 kg
8016135VLHOT	Ø80	M16	135	80	120	16	8,5 mm	13	2000 kg
8016175VLHOT	Ø80	M16	175	100	160	16	8,5 mm	13	2000 kg
8016115VLHOT	Ø80	M16	215	120	200	16	8,5 mm	13	2000 kg
10016135VLHOT	Ø100	M16	135	80	120	17	10,5 mm	13	4000 kg
10016175VLHOT	Ø100	M16	175	100	160	17	10,5 mm	13	4000 kg
10016115VLHOT	Ø100	M16	215	120	200	17	10,5 mm	13	4000 kg
8020135VLHOT	Ø80	M20	135	80	120	16	8,5 mm	17	2000 kg
8020175VLHOT	Ø80	M20	175	100	160	16	8,5 mm	17	2000 kg
8020115VLHOT	Ø80	M20	215	120	200	16	8,5 mm	17	2000 kg
10020135VLHOT	Ø100	M20	135	80	120	17	10,5 mm	17	4000 kg
10020175VLHOT	Ø100	M20	175	100	160	17	10,5 mm	17	4000 kg
10020115VLHOT	Ø100	M20	215	120	200	17	10,5 mm	17	4000 kg

STOPY HIGIENICZNE PODSTAWA GUMOWA

Numer kat.	STOPY HIGIENICZNE PODSTAWA GUMOWA							Max kg.
	D	M	H	H-min	H-max	B	K	
4812135VLH	Ø48	M12	135	80	120	20	10	300 kg
4812175VLH	Ø48	M12	175	100	160	20	10	300 kg
4812115VLH	Ø48	M12	215	120	200	20	10	300 kg
7512135VLH	Ø75	M12	135	80	120	23	10	600 kg
7512175VLH	Ø75	M12	175	100	160	23	10	600 kg
7512115VLH	Ø75	M12	215	120	200	23	10	600 kg
10412135VLH	Ø104	M12	135	80	120	27	10	1000 kg
10412175VLH	Ø104	M12	175	100	160	27	10	1000 kg
10412115VLH	Ø104	M12	215	120	200	27	10	1000 kg
4812135VLH	Ø48	M16	135	80	120	20	13	300 kg
4812175VLH	Ø48	M16	175	100	160	20	13	300 kg
4812115VLH	Ø48	M16	215	120	200	20	13	300 kg
7512135VLH	Ø75	M16	135	80	120	23	13	600 kg
7512175VLH	Ø75	M16	175	100	160	23	13	600 kg
7512115VLH	Ø75	M16	215	120	200	23	13	600 kg
10412135VLH	Ø104	M16	135	80	120	27	13	1000 kg
10412175VLH	Ø104	M16	175	100	160	27	13	1000 kg
10412115VLH	Ø104	M16	215	120	200	27	13	1000 kg
4812135VLH	Ø48	M20	135	80	120	20	17	300 kg
4812175VLH	Ø48	M20	175	100	160	20	17	300 kg
4812115VLH	Ø48	M20	215	120	200	20	17	300 kg
7512135VLH	Ø75	M20	135	80	120	23	17	600 kg
7512175VLH	Ø75	M20	175	100	160	23	17	600 kg
7512115VLH	Ø75	M20	215	120	200	23	17	600 kg
10412135VLH	Ø104	M20	135	80	120	27	17	1000 kg
10412175VLH	Ø104	M20	175	100	160	27	17	1000 kg
10412115VLH	Ø104	M20	215	120	200	27	17	1000 kg